


## STORAGE CENTER TECHNICAL SPECIFICATIONS

Storage Center goes beyond the boundaries of traditional storage systems by combining modular standards-based hardware and intelligent, innovative software to manage your data differently. Storage Center's scalable hardware platform features unprecedented flexibility and unlimited growth. The powerful software applications optimize utilization, automate tiered storage, simplify replication and speed data recovery. The entire solution is managed with a single interface, streamlining administration.

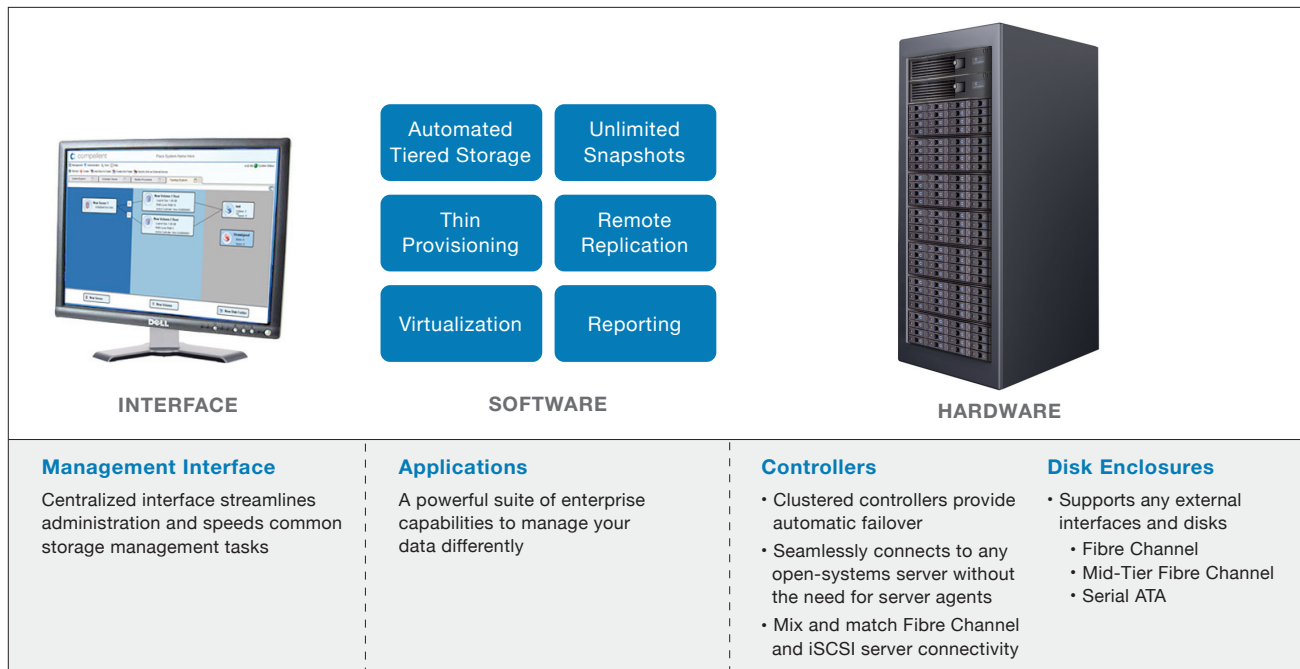

### Modular Hardware Architecture

- » Standards-based
- » Modular, highly available hardware architecture
- » Add capacity, connectivity and performance incrementally to match demand
- » Mix and match any number of drives, and enclosures

### Powerful Software Applications

- » Suite of powerful, innovative software applications
- » Provision unlimited volumes from a single, shared pool
- » Optimize utilization, speed local and remote replication
- » Automate tiered storage

### Intuitive, Unified Interface

- » Centralized, point-and-click wizard-based set up and management
- » Comprehensive Phonehome capabilities
- » Automatic notification when user-defined capacity thresholds are reached
- » Advanced storage consumption and chargeback reporting

## STORAGE CENTER HARDWARE

Storage Center's Hardware architecture employs a modular build-as-you-grow approach that provides a low cost of entry with unlimited growth. The flexible hardware platform enables simultaneous mixing and matching of any server interface or drive technology. Add capacity, connectivity and performance incrementally to match demand.

### CONTROLLER

Number of Controllers	1 or 2
PCI-X Expansion Slots	4
Expansion Slot Adapters	Fibre Channel and/or iSCSI
Maximum Number of Ports	16
Modular Architecture	Yes
Processor Speed	3.2 GHz XEON
Active/Active Cluster	Yes
Power Supplies Redundant and Hot-swappable	Yes
Cooling Fans Redundant and Hot-swappable	Yes
Controller(s) Redundant and Hot-swappable	Yes, with Clustered Controllers
Controller Cluster Distance	300 meters

### CACHE

Maximum Cache Size per System	2.25 GB
Multi-threaded Read Ahead, Mirrored Write Cache	Yes
Cache Back-up Battery	72 hours

## FRONT END (HOST) INTERFACE

Host Interface Support	Fibre Channel and/or iSCSI
Simultaneous Host Interface Support	Yes, Fibre Channel and/or iSCSI
Maximum Host Ports	14
Fabric Switch Support	Yes
Host Operating System Support	Microsoft Windows, Sun Solaris, HP-UX, Linux, IBM, AIX, Novell Netware, Apple, Tru64, VMware
Server Agent Required	No
Microsoft Cluster Server Support	Yes
Microsoft Multipath Input/Output (MPIO) Support	Yes
NAS Support (optional)	Yes

## BACK END (ENCLOSURE) INTERFACE

Disk Enclosure Interface	Fibre Channel Arbitrated Loop
Maximum Number of Back End Ports	14
Maximum Number of Back End Loops	7
Enclosures per Loop	
SBOD Fibre Channel	7
JBOD SATA	3

## DISK DRIVE ENCLOSURES

Enclosure Support	SBOD Fibre Channel, JBOD SATA
Disk Drive Support	Fibre Channel, Mid-Tier Fibre Channel, SATA
Intermixed Disk Drive Capacities	Yes
Maximum Number of Disk Drives per Enclosure	16
Maximum Number of Disk Drives	784
Maximum Raw Capacity	392 TB
Disk Drive Capacity	300 GB 10,000 RPM, 146 GB 10,000 RPM,
Fibre Channel	146 GB 15,000 RPM, 73 GB 15,000 RPM
Mid-Tier Fibre Channel	500 GB 7,200 RPM
SATA	300 GB SATA, 7,200 RPM

### DISK DRIVE ENCLOSURES (continued)

RAID Level Support	RAID 0, 5, and 10
Power Supplies Redundant and Hot-swappable	Yes
Disk Drives Redundant and Hot-swappable	Yes
Automatic Drive Failover	Yes
Automatic Drive Rebuild	Yes
Maximum Number of Hot Spares	Configurable

### Operating Environment

	CONTROLLER	SBOD FIBRE CHANNEL ENCLOSURE	JBOD SATA ENCLOSURE
Physical Configuration	Rack	Rack	Rack
Height	5.1" (132 mm), 3 EIA Units	5.12" (130 mm), 3 EIA Units	5.12" (130 mm), 3 EIA Units
Width	17.1", (434 mm)	19.0" (482.6 mm)	17.6" (447 mm)
Depth	25.5" (648 mm)	19.7" (500 mm)	21.7" (551 mm)
Weight	75 lbs. (34.1 kg)	77.6 lbs. (35 kg)	81lbs. (30.5 kg)
Power Consumption	375 watts	450 watts	450 watts
Power Supplies	Triple	Dual	Dual
Heat Dissipation (BTU/hr)	1,280	1,540	1,540
Temperature	50°F - 95°F (10°C - 35°C)	41°F - 104°F (5°C - 40°C)	32°F - 122°F (0°C - 50°C)
Humidity (non-condensing)	8% - 90%	20% - 80%	20% - 80%
Inlet Type	NEMA 5-15/CS22.2, n°42	NEMA 5-15/CS22.2, n°42	NEMA 5-15/CS22.2, n°42

### OPERATING VOLTAGE

Controller	100 - 240 VAC 50/60 Hz, 14 Amp
Enclosure	
SBOD Fibre Channel	110 - 240 VAC @ 48-62 Hz
JBOD SATA	100 - 120 VAC @ 47/63 Hz, 7.0A maximum 200 - 240 VAC @ 50/60 Hz, 3.5A maximum Auto-sensing

## EMISSIONS/SAFETY

<b>Controller</b>	<p>FCC Class B; EN55022 Class B; EN 61000-3-2/-3-3; CISPR 22 Class B; EN55024/CISPR 24; (EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11); EN60950/IEC 60950 Compliant</p> <p>UL Listed (USA), CUL Listed (Canada), TUV Certified (Germany), CE Marking (Europe)</p>
<b>Enclosure</b>	
SBOD Fibre Channel	<p>UL and cUL listed. Tested to UL/IO/EN 60950. Certified Body Certificate and Report to IEC60950. CE marked to the requirements of the Low Voltage Directive 73/23/EEC and the Electromagnetic Compatibility Directive 89/336/EEC. FCC Class A.</p> <p>EMC: EN55022/EN61000-3-2, EN61000-3-3</p>
JBOD SATA	<p>UL and cUL listed. Tested to UL/IO/EN 60950. Certified Body Certificate and Report to IEC60950.</p> <p>CE marked to the requirements of the Low Voltage Directive 73/23/EEC and the Electromagnetic Compatibility Directive 89/336/EEC. FCC Class A.</p> <p>EMC: EN55022/EN61000-3-2, EN61000-3-3</p>

## STORAGE CENTER SOFTWARE

Storage Center Software places enterprise storage capabilities at your fingertips through a powerful suite of applications that optimize utilization, automate replication, simplify replication and speed data recovery.

### SOFTWARE

Single, Centralized Management Interface for all Storage Operations	Yes
Intuitive Wizard Functionality for all Storage Operations	Yes
Remote Management from Anywhere	Yes
Secure Administration	Yes
Microsoft Windows Certified Features	Yes

---

## HARDWARE AND SOFTWARE WARRANTY

- » 3 Year Hardware Warranty
  - » 90 Day Software Warranty
  - » 24x7 Call Center Support
  - » Advance Hardware Parts Exchange
- 

## COMPELLENT

7625 Smetana Lane  
Eden Prairie, MN 55344

Tel: 877-715-3300  
Fax: 952-294-3333

[www.compellent.com](http://www.compellent.com)

---

## ABOUT COMPELLENT

Compellent delivers affordable, modular storage solutions exclusively through business partners that provide companies of all sizes enterprise storage capabilities without big system costs or complexities. Designed by network storage and virtualization pioneers, Compellent enables any business to cut storage expenditures in half, recover from data hazards within minutes, scale to any capacity across any technology and easily manage its storage without adding staff.

---

## Storage Center Core

<b>Virtualization</b>	Manage disks as a single pool and present disk resources to any server.
<b>Disk Optimizer</b>	Intelligently restripes data as disks are added to optimize performance.
<b>Copy-Mirror-Migrate</b>	Make copies or mirrors and migrate volumes without impacting users.
<b>Boot from SAN</b>	Allow diskless servers to share storage resources and boot from the SAN.
<b>Heterogeneous OS</b>	Support any number of simultaneous operating systems.
<b>LUN Masking</b>	Hide unassigned LUN/ID numbers for secure storage domains.
<b>Performance Monitoring</b>	Real-time reports to identify and optimize performance and utilization.
<b>Unified User Interface</b>	Enterprise-level functionality through a common intuitive user interface.
<b>Multi-System Administration</b>	Operate any Storage Center from any standard browser.
<b>Multi-User Profiles</b>	Create unique user profiles with administrator configured privileges.
<b>Remote Monitoring/Phonehome</b>	Remotely report status and automatically trigger service responses.

## Storage Center Applications

<b>Data Instant Replay</b>	Create space-efficient Replays (snapshots) that restore data instantaneously.
<b>Remote Instant Replay</b>	Create space-efficient Replays (snapshots) of data at multiple locations.
<b>Dynamic Capacity</b>	Allocate space based on actual data written (Thin Provisioning).
<b>Data Progression</b>	Automate tiered storage between storage classes based on user-defined rules.
<b>Dynamic Controllers</b>	Cluster storage controllers to increase system availability and performance.
<b>Enterprise Manager</b>	Comprehensive monitoring, reporting and remote replication management.
<b>Multipath Manager for Microsoft Servers</b>	Failover and load balancing for Microsoft Servers (MPIO).
<b>Replay Manager for Microsoft Servers</b>	Non-disruptive Replays for Microsoft Servers (VSS).

© Copyright Compellent 2007. All rights reserved. DSSCTS022307